

INTELLIGENT SERIES

4" Industrial Thermal Transfer
Barcode Printer



INTELLIGENT SERIES STRONG PERFORMANCE FOR HIGH VOLUME LABEL PRINT.



KEY FEATURES

- 400 MHz 32-bit ARM9 processor with 128 MB SDRAM, 128 MB Flash memory
- Internally scalable true type font engine
- Firmware emulates TSPL, EPL, ZPL, ZPL II, DPL
- Bartender® Free Windows drivers and label design software (available via download)
- Provide Windows printer utility, Windows SDK and Android SDK

Model	Resolution	Max. Print Width	Max. Print Length	Max. Print Speed	Dimensions (W * H * D)	Weight
GI-2408T	203DPI	4.1"	90"	203 mm (8")/ secod	255 mm*265 mm*425 mm	9.65kg
GI-3406T	300DPI	4.27"	40"	152 mm (6")/ secod		



INTELLIGENT SERIES 4" Industrial Thermal Transfer Barcode Printer

MODEL	GI-2408T	GI-3406T	GI-2408T	GI-3406T
Grade	Standard	Standard	Empower	Empower
Resolution	8dots/mm (203DPI)	12dots/mm (300DPI)	8dots/mm (203DPI)	12dots/mm (300DPI)
Printing Method	Thermal Transfer & Direct Thermal			
Max. print speed	203mm(8")/second	152mm(6")/second	203mm(8")/second	152mm(6")/second
Max. print width	104 mm (4.1")	108.4 mm (4.27")	104 mm (4.1")	108.4 mm (4.27")
Max. print length	2,286mm (90")	1,016mm (40")	2,286mm (90")	1,016mm (40")
CPU	400MHZ, 32-bits, ARM9			
Memory RAM	128 MB SDRAM		256 MB SDRAM	
Memory ROM	128 MB Flash Memory		256 MB Flash Memory	
Interface	<ul style="list-style-type: none"> •USB 2.0 High Speed 480Mbps •USB Host 2.0, for scanner or PC keyboard •RS-232 		<ul style="list-style-type: none"> •Internal Ethernet 10/100Mbps •Internal Bluetooth 4.0 (factory option) •Internal WiFi (factory option) 	
Real Time Clock	Standard			
Buzzer	Standard			
Dealer options	•Guillotine cutter (full cut and partial cut)		•Peeler	
Sensors	<ul style="list-style-type: none"> •Gap transmissive sensor (position adjustable) •Black mark reflective sensor (position adjustable) •Head open sensor 		<ul style="list-style-type: none"> •Ribbon out senso •Ribbon end sensor •Label end sensor 	•Label begin sensor
Power	Internal universal switching power supply Input: AC 200-240V, 1.5A, 50-60Hz, Output : DC 24V, 5A, 120W			
User Interface	<ul style="list-style-type: none"> •1 power switch •2 buttons (Feed & Pause) •4 LEDs (Online, Error, Ribbon, Communication status) 		<ul style="list-style-type: none"> •1 power switch •1 buttons (Feed) •1 LEDs(Online, Error, Ribbon status) •Capacitive Touch Screen, TFT LCD 4.3" 16 bits Color, 272 x 480 pixels, with back lights 	
Internal fonts	<ul style="list-style-type: none"> •8 alpha-numeric bitmap fonts •True type font engine (need download scalable font file) 			
1D Barcode	Code 11, Code 39, Code 93, Code 128 (subsets A, B, C), UPC-A, UPC-E, UCC-128, Codabar, EAN/JAN-8, EAN/JAN-13, Interleaved 2 of 5, ITF14, MSI Pleassy, PostCode, Telepen			
2D Barcode	QR Code, Micro QR Code, PDF417, Micro PDF417, Grid Matrix, MaxiCode, Aztec Code, Data Matrix			
Rotation	Font and barcode support 0, 90, 180, 270 degree			
Printer language	Compatible to TSPL, EPL, ZPL, ZPL II, DPL			
Ribbon	450 M long, max. OD 105 mm, 1" core (ink coated outside)			
Ribbon width	Max.115mm (4.5")			
Media type	Continuous, die-cut, black mark, fan-fold (outside wound)			
Media width	20~ 120 mm (0.78" ~ 4.72")			
Media thickness	0.06~0.254mm (2.36 ~ 10 mil)			
Media core diameter	25.4 mm ~ 76.2 mm (1" ~ 3")			
Label roll capacity	203 mm (8") OD			
Label length	5~2,286 mm (0.2" ~ 90")	5~1,016 mm (0.2" ~ 40")	5~2,286 mm (0.2" ~ 90")	5~1,016 mm (0.2" ~ 40")
Physical dimension	255mm (W) * 265mm (H) * 425mm (D)			
Net Weight	9.65kg			

Enclosure

Die-cast based print mechanism/Metal cover with large clear media view window

Safety regulation

FCC Class A, CE Class A, CCC, BIS, CB

Ribbon width

Max.115mm (4.5")

Ribbon

450 M long, max. OD 105 mm, 1"core (ink coated outside)

Environment condition


Operation:
5 ~ 40°C, 25 ~ 85% noncondensing
Storage:
-40 ~ 60°C, 10 ~ 90% noncondensing

Environmental concern

Comply with RoHS, REACH, WEEE

Accessories

- Windows labeling software CD disk
- Quick start guide
- USB cable
- Power cord
- 1" ribbon spindle x 2 for 450M ribbon

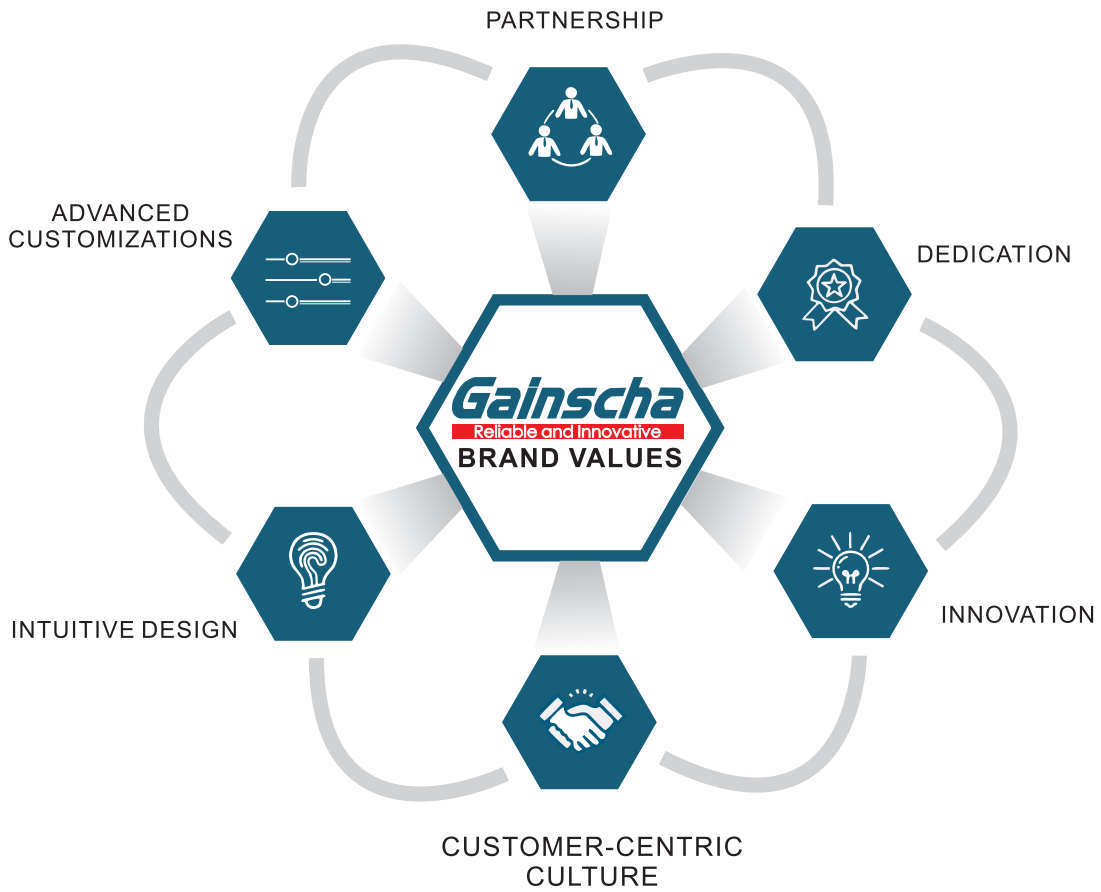

COMMITMENT TO CUSTOMER APPLICATIONS





The benefits of barcode printers in a business are fairly obvious: they reduce errors during checkout and provide an accurate and timely inventory reference. Barcode scanners come in a variety of types, including short-range, long-range and embedded.

Barcode printers

In addition to standard printers for receipts and invoices, by adding a barcode creator to the mix, owners can create labels needed to organize inventory and files, ship items and more. Making barcodes from durable, fade-resistant, heat-sensitive label stock ensures that your efforts at organization won't be destroyed over time.

